


FARM ACCESSORIES



Elephant ENERGIZERS

- guarantee 36 months, guarantee for thunder 12 months

NOTE! Even the minor leakage of current reduces the power of the energizer. It is also extremely important that the earthing is made properly.

KOHSEL ELEPHANT



- Peak voltage = the maximum output voltage
- Pulse energy = the energy J (joules) which is effectively available on the fence line
- Charge energy = a theoretical dimension, measured inside the fence controller
- Theoretical fence length = the length of fence wire which keeps the output voltage over 1500 V

BATTERY ENERGIZERS


ORDER NUMBER	BATTERY ENERGIZER NAP1E	BATTERY ENERGIZER NAA25
Battery	9 V (a)	12 V
Peak voltage	7500 V	8000 V
Pulse energy	0,12 J	2,9 J
Charge energy	0,15 J	3,5 J
Max. fence length:		
theoretical	7,0 km	125 km
normal load	1,0 km	10 km
extreme load	0,2 km	3 km
	All-round battery energizer for cow and horse fences. Battery not included. Suitable battery NA9130 (a)-battery	Powerfull all-round battery energizer for all fences. Battery not included. Suitable battery f.eg. B812070000 75 Ah



ELECTRONIC ENERGIZERS

- burn the grass off

ORDER NUMBER	ELECTRONIC ENERGIZER NAM40	ELECTRONIC ENERGIZER NAM65D	ELECTRONIC ENERGIZER NAM115D
Power supply	230 V	230 V	230 V
Peak voltage	9500 V	9500 V	9500 V
Pulse energy	4,0 J	6,5 J	11,5 J
Charge energy	5,0 J	8,0 J	16,0 J
Max. fence length:			
theoretical	135 km	230 km	450 km
normal load	15 km	20 km	40 km
extreme load	8 km	10 km	20 km
	Powerful all-round energizer for cow and horse fences.	Very powerful energizer for all fences.	The most powerful energizer for most difficult fencing with extreme leakage.



FENCER BATTERY
9 V / 130 Ah
NA9130



DIGITAL VOLT METER
NA227

- indicates the voltage on the fence
- operates with 9 V battery



FENCE TESTER
NA2159

- a good little gauge
- indicates the voltage on the fence on a scale divided in 5

FENCING WIRES

- polyethene
- UV-guarantee 36 months



ORDER NUMBER	CONDUCTOR	LENGTH
NA2154	inox steel wire 3 x 0,16 mm	250 m
NA2178	inox steel wire 6 x 0,16 mm	500 m
NA2208	inox steel wire 5 x 0,16 mm, tinned copper wire 1 x 0,25 mm	250 m

FENCING ROPES

- polypropyleeniä
- UV-guarantee 36 months



ORDER NUMBER	CONDUCTOR	THICKNESS	LENGTH
NA2307	inox steel wire 6x0,16 mm	5 mm	200 m
NA2314	inox steel wire 6x0,20 mm	6 mm	200 m

FENCING TAPES

- polyethene
- UV-guarantee 36 months

ORDER NUMBER	CONDUCTOR	WIDTH	LENGTH
NA2222	inox steel wire 4 x 0,16 mm	10 mm	200 m
NA2253	inox steel wire 4 x 0,16 mm	20 mm	200 m
NA2277	inox steel wire 8 x 0,16 mm	40 mm	200 m
NA2895	inox steel wire 2 x 6 x 0,20 mm	40 mm	200 m FOR WINTER



GATE HANDLE

NA1706


- powerful spring



GATE HANDLE HOOK

NA0570

- 6 pcs/bag

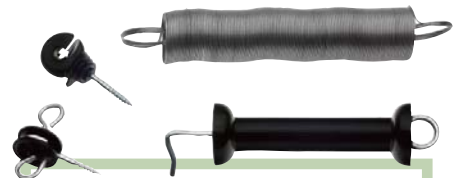

GATE HANDLE KIT WITH SPRING

NA2352

- max. length 5 m

ELASTIC ROPE GATE

NA3939

- max. length 3,2 m



CORD JOINER

NA3946

- 5 pcs



TAPE CONNECTOR

NA3953

- for 20 mm tape
- 5 pcs



TAPE CONNECTOR

NA3960

- for 40 mm tape
- 5 pcs





**RING ISOLATOR
with continuing support
NA1096**
- 25 pcs/bag



**RING ISOLATOR
with continuing support
NA1157**
- 150 pcs/bucket

Includes
mounting
tool



**TAPE INSULATOR
NA0594**
- for 10-40 mm tapes
- 25 pcs/bag




**CORNER INSULATOR
NA1546**
- 10 pcs/bag



**LONG DISTANCE
INSULATOR 220 mm
NA0624**
- 15 pcs/bag



**CLIP
INSULATOR
NA0549**
- for spring steel pile, 25 pcs/bag

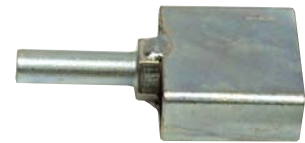

**MOUNTING
TOOL
NA2437**
- for ring isolator



**WIRE INSULATOR
NA2994**
- 50 pcs/bag



PLASTIC PILE 105 cm
NA2888

PLASTIC PILE 160 cm
NA2871

Firm SPRING STEEL PILE 105 cm with insulator
NA2925

