

# CHAINS





## TOP-QUALITY CHAINS FOR AGRICULTURAL TRACTORS



Tellefsdal Super tractor chains are already a concept in Finland. The chains are made of high-quality Finnish Dalsbruk Oy manganese / boron-steel (17Mn5 and 15Mn4) which is mainly used when making tyre chains. The chains are surface-hardened as one entirety after welding and assembling. The hardening grade of surface is 700-800 Hv2 and the core 400-480 Hv2 in all wear parts.

The chains have been tested with the experience of numerous years in all kind of conditions together with the users and the development continues still. The chain suits fine for radial tyres.

Excellent durability and torque due to large number of taps and hardening. Easy to lengthen and shorten. One pair in one package, suitabilities marked on the packages. The chains are delivered in pairs and the prices are per one pair.



- Big studs and zikzak-design ensures optimal grip in difficult conditions
- Maximizes the tractor traction in winter conditions and forest use
- Due to design, studs and hardening, the super chain have long life
- Two vertical chains brings comfort for driving on the road
- Safe and efficient driving
- Suits fine for different tyre brands, for new and worn ones
- Easy to shorten and lengthen according to tyre size
- Mounting instructions with pictures included
- Studs are 1 mm thicker than threaded chain

### T14.01

## 8 mm

ORDER NUMBER	GROUP	TYRE SIZE	
EIK10166828	S 428	12,4 -	16
EIK10166828	S 428	12,5 -	18
EIK10166828	S 428	12,5/80 -	18
EIK10166828	S 428	300/70 -	20
EIK10166828	S 428	320/70 -	20
EIK10166436	S 436	11,2 -	24
EIK10166436	S 436	12,4 -	24
EIK10166456	S 456	13,6 -	24
EIK10166456	S 456	14,9 -	24
EIK10166480	S 480	16,9 -	24
EIK10166432	S 432	250/85-	24
EIK10166436	S 436	280/85-	24
EIK10166432	S 432	320/70 -	24
EIK10166436	S 436	320/85-	24
EIK10166456	S 456	340/85-	24
EIK10166452	S 452	360/70 -	24
EIK10166452	S 452	380/70 -	24
EIK10166456	S 456	380/85-	24
EIK10166476	S 476	420/70 -	24
EIK10166480	S 480	420/85-	24
EIK10166476	S 476	440/65 -	24
EIK10166830	S 460	15,5 -	25
EIK10166480	S 480	17,5 -	25
EIK10166830	S 460	14,9 -	26
EIK10166476	S 476	400/60 -	26,5
EIK10166476	S 476	400/65 -	26,5
EIK10166819	S 440	11,2 -	28
EIK10166819	S 440	12,4 -	28
EIK10166830	S 460	13,6 -	28
EIK10166830	S 460	14,9 -	28
EIK10166484	S 484	16,9 -	28
EIK10166819	S 440	280/85-	28
EIK10166436	S 436	320/70 -	28
EIK10166819	S 440	320/85-	28
EIK10166830	S 460	340/85-	28
EIK10166456	S 456	360/70 -	28
EIK10166480	S 480	420/70 -	28
EIK10166480	S 480	440/65 -	28
EIK10166484	S 484	16,9 -	30
EIK10166480	S 480	420/70 -	30
EIK10166820	--	12,4 -	32
EIK10166820	--	320/85-	32
EIK10166822	S 444	12,4 -	36
EIK10166852	S 464	13,6 -	36
EIK10166822	S 444	320/85-	36
EIK10166852	S 464	340/85-	36
EIK10166822	S 444	12,4 -	38
EIK10166852	S 464	13,6 -	38

## 9,5 mm

ORDER NUMBER	GROUP	TYRE SIZE	
EIK10166554	S 554	16,9 -	24
EIK10166545	S 545	19,5 -	24
EIK10166554	S 554	420/85-	24
EIK10166545	S 545	540/65 -	24
EIK10166558	S 558	16,00-24/	25
EIK10166554	S 554	17,5 -	25
EIK10166556	S 556	17,5 -	25L5
EIK10166582	S 582	18,00-24/	25
EIK10166554	S 554	16,9 -	26
EIK10166570	S 570	18,4 -	26
EIK10166556	S 556	16,9 -	28
EIK10166556	S 556	420/85-	28
EIK10166545	S 545	480/65 -	28
EIK10166570	S 570	540/65 -	28
EIK10166558	S 558	16,9 -	30
EIK10166578	S 578	18,4 -	30
EIK10166552	--	380/85-	30
EIK10166554	S 554	420/70 -	30
EIK10166558	S 558	420/85-	30
EIK10166578	S 578	460/85-	30
EIK10166570	S 570	480/70 -	30
EIK10166566	S 566	16,9 -	34
EIK10166582	S 582	18,4 -	34
EIK10166566	S 566	420/85-	34
EIK10166566	S 566	420/85 -	34
EIK10166582	S 582	460/85-	34
EIK10166578	S 578	480/70 -	34
EIK10166586	S 586	520/70 -	34
EIK10166586	S 586	540/65 -	34
EIK10166590	S 590	540/70 -	34
EIK10166593	S 593	600/65 -	34
EIK10166593	S 593	620/60 -	34
EIK10166566	S 566	14,9 -	38
EIK10166567	--	16,9 -	38
EIK10166583	--	18,4 -	38
EIK10166592	--	20,8 -	38
EIK10166567	--	420/85-	38
EIK10166583	--	460/85-	38
EIK10166582	S 582	480/70 -	38
EIK10166587	--	520/70 -	38
EIK10166592	--	520/85-	38
EIK10166590	S 590	540/65 -	38
EIK10166594	S 594	580/70 -	38
EIK10166594	S 594	600/65 -	38
EIK10166597	--	650/65 -	38

## EXTENSION PIECE SETS

ORDER NUMBER	mm	TYRE SIZE
EIK10243308	8	11,2 - 12,4
EIK10243318	8	13,6 - 14,9
EIK10243391	9,5	12,4
EIK10243392	9,5	13,6 - 14,9
EIK10243393	9,5	16,9 - 18,4
EIK10243394	9,5	540 - 600



## T14.02

## TRACTOR CHAINS FOR SNOW PLOUGHING AND ROAD DRIVING

- tested by Norwegian Forest Research Institute (NISK) and by professional users
- good choice for studded tyres
- offers superb traction, directional stability and braking force
- wear-resisting
- low weight (rear tyre chain 18-20 kg) and it's easy to mount and take off
- does not disturb driving
- made of specially hardened 5 mm square steel wire and horizontal traction bars
- primarily an option for studded tyres, but when driving on the road it's also better than the ordinary tractor chains
- in bad conditions the driving with NORTRACTOR-chains is safer than driving with studded tyres
- makes snow ploughing notably easier
- saves fuel compared with the use of ordinary tractor chains
- NORTRACTOR-chains are very wear-resisting
- NORTRACTOR is made to fit most tyre sizes so it must be shortened in most cases



**NOTE! Do not shorten too much!**  
Nortractor -chains should be a little looser on tyre than other chain models.

### Test drives

The chains have gone through very strict test which included snow ploughing, lots of driving and driving with high speed on bare road. The feedback of the test drives have been very positive. Here is a short summary of the feedback:

- notably better than expected from a light-looking appearance
- much better traction and stability than studded tyres have
- very suitable for road driving
- very low wearing

### Top points on the careful tests of Norwegian Forest Research Institute (NISK)

NISK tested NORTRACTOR-chains, after which the results were compared with the test points of non-studded tyres, studded tyres and ordinary tractor chains. The results were very satisfying, which can be noticed from the following summary:

**Table 1:**  
Increase of gravity in % compared with the tyres with no studs

Ground	Studded tyres	Ordinary chains	NorTractor
Ice	37	63	69
Snow	0	47	22

**Table 2:**  
Increase of braking force in % compared with the tyres with no studs.

Ground	Studded tyres	Ordinary chains	NorTractor
Ice	23	91	55
Snow	4	32	22

**Table 3:**  
Increase of that force in % which is needed to move the tractor sideways compared with the tyres with no studs.

Ground	Studded tyres	Ordinary chains	NorTractor
Snow	16	35	24

ORDER NUMBER	GROUP	TYRE SIZE	
EIK10123374	IF-174	12,5 -	18
EIK10123393	GF-193	11,2 -	20
EIK10123386	IF-186	12,4 -	20
EIK10123386	IF-186	12,5 -	20
EIK10123417	IH-217	14,5 -	20
EIK10123417	IH-217	14,9 -	20
EIK10123386	IF-186	360/70 -	20
EIK10123393	GF-193	11,2 -	24
EIK10123320	IF-220	12,4 -	24
EIK10123417	IH-217	13,6 -	24
EIK10123429	IH-229	14,9 -	24
EIK10123417	IH-217	14,9/80 -	24
EIK10123552	KJ-252	16,9 -	24
EIK10123534	KJ-234	17,5L -	24
EIK10123541	KJ-241	19,5L -	24
EIK10123393	GF-193	280/85-	24
EIK10123386	IF-186	320/70 -	24
EIK10123320	IF-220	320/85 -	24
EIK10123417	IH-217	340/85 -	24
EIK10123417	IH-217	360/70 -	24
EIK10123417	IH-217	380/70 -	24
EIK10123429	IH-229	380/85 -	24
EIK10123534	KJ-234	420/70 -	24
EIK10123552	KJ-252	420/85-	24
EIK10123534	KJ-234	440/65 -	24
EIK10123534	KJ-234	445/70 -	24
EIK10123534	KJ-234	460/65 -	24
EIK10123534	KJ-234	480/65 -	24
EIK10123541	KJ-241	480/70 -	24
EIK10123552	KJ-252	520/65 -	24
EIK10123647	ML-247	540/65 -	24
EIK10123429	IH-229	13,00-24/	25
EIK10123454	IH-254	14,00-24/	25
EIK10123579	KJ-279	16,00-24/	25
EIK10123429	IH-229	15,5 -	25
EIK10123552	KJ-252	17,5 -	25
EIK10123552	KJ-252	16,9 -	26
EIK10123572	KJ-272	18,4 -	26
EIK10123541	KJ-241	480/70 -	26
EIK10123647	ML-247	540/65 -	26
EIK10123417	IH-217	400/65 -	27
EIK10123320	IF-220	12,4 -	28
EIK10123429	IH-229	13,6 -	28
EIK10123454	IH-254	14,9 -	28
EIK10123552	KJ-252	16,9 -	28
EIK10123572	KJ-272	18,4 -	28
EIK10123320	IF-220	320/70 -	28
EIK10123320	IF-220	320/85-	28
EIK10123429	IH-229	360/70 -	28
EIK10123429	IH-229	380/70 -	28
EIK10123454	IH-254	380/85-	28
EIK10123541	KJ-241	420/70 -	28
EIK10123552	KJ-252	420/85-	28
EIK10123534	KJ-234	440/65 -	28
EIK10123541	KJ-241	480/65 -	28
EIK10123552	KJ-252	480/70 -	28
EIK10123647	ML-247	540/65 -	28

ORDER NUMBER	GROUP	TYRE SIZE	
EIK10123454	IH-254	14,9 -	30
EIK10123579	KJ-279	16,9 -	30
EIK10123572	KJ-272	18,4 -	30
EIK10123706	MN-306	23,1 -	30
EIK10123552	KJ-252	420/70 -	30
EIK10123579	KJ-279	420/85-	30
EIK10123572	KJ-272	460/85-	30
EIK10123572	KJ-272	480/70 -	30
EIK10123706	MN-306	620/75 -	30
EIK10123457	IH-257	12,4 -	32
EIK10123457	IH-257	320/85-	32
EIK10123579	KJ-279	16,9 -	34
EIK10123608	KL-308	18,4 -	34
EIK10123579	KJ-279	420/85 -	34
EIK10123608	KL-308	460/85 -	34
EIK10123698	KL-298	480/70 -	34
EIK10123698	KL-298	520/70 -	34
EIK10123697	ML-297	540/65 -	34
EIK10123697	ML-297	540/70 -	34
EIK10123706	MN-306	600/65 -	34
EIK10123457	IH-257	12,4 -	36
EIK10123478	IH-278	13,6 -	36
EIK10123457	IH-257	320/85-	36
EIK10123478	IH-278	340/85-	36
EIK10123478	IH-278	13,6 -	38
EIK10123579	KJ-279	15,5 -	38
EIK10123608	KL-308	16,9 -	38
EIK10123608	KL-308	18,4 -	38
EIK10123719	KN-319	20,8 -	38
EIK10123478	IH-278	340/85-	38
EIK10123579	KJ-279	400/75 -	38
EIK10123608	KL-308	420/85-	38
EIK10123608	KL-308	460/85 -	38
EIK10123608	KL-308	480/70 -	38
EIK10123719	KN-319	520/70 -	38
EIK10123719	KN-319	520/85-	38
EIK10123697	ML-297	540/65 -	38
EIK10123723	MN-323	580/70 -	38
EIK10123706	MN-306	600/65 -	38
EIK10123723	MN-323	650/60 -	38
EIK10123723	MN-323	650/65 -	38
EIK10123740	KN-340	20,8-	42
EIK10123740	KN-340	520/85-	42
EIK10123746	MN346	650/60-	42

## EXTENSION PIECE SETS

ORDER NUMBER	GROUP
EIK10123040	IH
EIK10123050	KJ
EIK10123060	KL
EIK10123080	MN
EIK10123090	KN



**T14.04**



Normal

Fine

Zik zak

Double

Nortrac Z

## CHAINS FOR CARS, VANS AND TRUCKS

TYRE SIZE	GROUP	ORDER NBR NORMAL	ORDER NBR FINE	ORDER NBR ZIK ZAK	ORDER NBR DOUBLE	ORDER NBR NORTRAC Z
8,25 x 15	H-63/6 mm	<b>EIK10130663</b>				
32 x 15	H-7-96/7 mm	<b>EIK10130796</b>				
245/75 x 16	H-63/6 mm	<b>EIK10130663</b>				
10 x 16,5	H-63/6 mm	<b>EIK10130663</b>				
12 x 16,5	7 mm	<b>EIK10130783</b>				
8,5 x 17,5	H-63/6 mm	<b>EIK10130663</b>				
225/70 x 17,5	H-63/6 mm	<b>EIK10130663</b>				
235/75 x 17,5	H-63/6 mm	<b>EIK10130663</b>				
245/70 x 17,5	H-63/6 mm	<b>EIK10130663</b>				
285/70 x 19,5	H-7-84/7 mm			<b>EIK10135784</b>		
305/70 x 19,5	H-7-84/7 mm			<b>EIK10135784</b>		
11,00 x 20	H-7-96/7 mm	<b>EIK10130796</b>		<b>EIK10135796</b>		<b>EIK10125430</b>
11,00 x 20	I-84/8 mm	<b>EIK10130884</b>	<b>EIK10132884</b>	<b>EIK10135884</b>	<b>EIK10260110</b>	
12,00 x 20	I-85/8 mm	<b>EIK10130885</b>	<b>EIK10132885</b>		<b>EIK10260112</b>	
12 x 22,5	H-7-96/7 mm	<b>EIK10130796</b>		<b>EIK10135796</b>		<b>EIK10125430</b>
12 x 22,5	I-84/8 mm	<b>EIK10130884</b>	<b>EIK10132884</b>	<b>EIK10135884</b>	<b>EIK10260110</b>	
13 x 22,5	I-85/8 mm	<b>EIK10130885</b>	<b>EIK10132885</b>		<b>EIK10260112</b>	
15 x 22,5	H-7-126/7 mm	<b>EIK10130706</b>		<b>EIK10135706</b>		
295/60 x 22,5	H-7-94/7 mm	<b>EIK10130794</b>				
295/80 x 22,5	H-7-96/7 mm	<b>EIK10130796</b>		<b>EIK10135796</b>		<b>EIK10125430</b>
295/80 x 22,5	I-84/8 mm	<b>EIK10130884</b>	<b>EIK10132884</b>	<b>EIK10135884</b>	<b>EIK10260110</b>	
315/70 x 22,5	H-7-96/7 mm	<b>EIK10130796</b>		<b>EIK10135796</b>		
315/70 x 22,5	I-84/8 mm	<b>EIK10130884</b>	<b>EIK10132884</b>	<b>EIK10135884</b>	<b>EIK10260110</b>	
315/75 x 22,5	H-7-96/7 mm	<b>EIK10130796</b>		<b>EIK10135796</b>		
315/75 x 22,5	I-84/8 mm	<b>EIK10130884</b>	<b>EIK10132884</b>	<b>EIK10135884</b>	<b>EIK10260110</b>	
315/80 x 22,5	H-7-97/7 mm	<b>EIK10130797</b>				<b>EIK10125430</b>
315/80 x 22,5	I-85/8 mm	<b>EIK10130885</b>	<b>EIK10132885</b>		<b>EIK10260112</b>	
385/65 x 22,5	H-7-126/7 mm	<b>EIK10130706</b>		<b>EIK10135706</b>		





## CHAINS FOR FORKLIFTS WITHOUT STUDS

ORDER NUMBER	TYRE SIZE	MATERIAL THICKNESS mm
<b>EIK10110502*</b>	16 x 7,50 x 8	5,00
<b>EIK10110503*</b>	18 x 8,50 x 8	5,00
<b>EIK10110507*</b>	16 x 6,50 x 8	5,00
<b>EIK10110551*</b>	18 x 9,50 x 8	5,00
<b>EIK10111665</b>	28 x 9 x 15	6,00
<b>EIK10111615</b>	6,00 x 9	6,00
<b>EIK10111620</b>	6,50 x 10	6,00
<b>EIK10111635</b>	7,00 x 12	6,00
<b>EIK10111640</b>	27 x 10 x 12	6,00
<b>EIK10111650</b>	7,00 x 15	6,00
<b>EIK10111660</b>	8,25 x 15	6,00
<b>EIK10111668</b>	29 x 12,5 x 15	6,00
<b>EIK10111735</b>	7,50 x 15	7,00

\* = with studs

## ATV CHAINS FOR TERRAIN CARS WITH STUDS

ORDER NUMBER	TYRE SIZE	GROUP	MATERIAL THICKNESS mm
<b>EIK10168605</b>	22 x 11 x 8	605	6
	22 x 8 x 10		
	22 x 10 x 10		
	23 x 10 x 10		
	24 x 9 x 11		
	23 x 8 x 12		
<b>EIK10168610</b>	23 x 10 x 12	610	6
	24 x 9 x 12		
	24 x 11 x 10		
	24 x 11,5 x 10		
	25 x 10 x 10		
	25 x 11 x 10		
<b>EIK10168615</b>	24 x 10 x 11	615	6
	25 x 8 x 12		
	25 x 10 x 12		
	26 x 10,5 x 12		
	25 x 12 x 9		
	25 x 11 x 10		
	25 x 12 x 10		
25 x 12,5 x 12			
26 x 10,5 x 12			
26 x 12 x 12			
27 x 12 x 12			

## SIDE LOCKS FOR TRUCK CHAINS



ORDER NO.	NO.	DESCRIPTION
EIK10246316	1	for 4 - 4,5 mm side chain
EIK10246318	2	for 5 - 5,5 mm side chain
EIK10246320	3	for 6 - 7 mm side chain
EIK10246330	4	for 8 - 9 mm side chain

## SIDE LOCKS FOR TRACTOR CHAINS



ORDER NO.	NO.	DESCRIPTION
EIK10246106	1	6 mm x 16 cm, for 7-8 mm side chain
EIK10246108	2	8 mm x 19 cm, for 9-10 mm side chain
EIK10246109	3	9 mm x 21 cm, for 11-13 mm side chain

## CHAIN EXTENSIONS



ORDER NO.	NO.	DESCRIPTION
EIK10249305	5	for NorTrac/ NorTractor chain
EIK10249308	8	for 8-9 mm chain
EIK10249310	10	for 9,5-11 mm chain
EIK10249313	13	for 13-14 mm Grip chain
EIK10249316	16	for 16 mm Grip chain

## CHAIN REPAIR LINKS



ORDER NO.	PACKING SIZE	MATERIAL THICKNESS
KLK03	25	3 mm
KLK04	25	4 mm
KLK05	25	5 mm
KLK06	25	6 mm
KLK08	10	8 mm
KLK10	10	10 mm
KLK12	10	12 mm

## CHAIN EXTENSION



ORDER NO.	NO.	DESCRIPTION
EIK10249595	9,5	Super

## REPAIR LINK




ORDER NO.	NO.	DESCRIPTION
EIK10249500	5	NorTractor

## CHAIN SNAP LOCKS



ORDER NO.	mm	pcs/pack.	TENSILE STRENGTH kg
V1650C	4	10	180
V1656C	6	7	400
V1651C	8	5	700
V1652C	9	4	900
V1653C	12	2	1500
V1654C	14	1	2200
V1655C	16	1	2900

## SHACKLES WITH SCREW

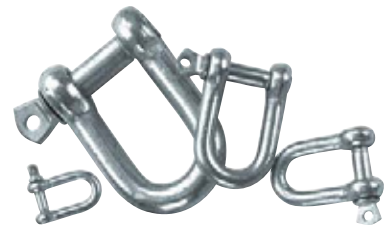

ORDER NO.	kg	mm	PACKAGE kg/pcs
V1611A		6	2,1 / 80
V1612A		8	1,7 / 30
V1613A		10	2,2 / 20
V1614A		12	2,0 / 10
V1615A		14	4,8 / 15
V1616A		16	2,4 / 5
V1617A		19	2,5 / 3

## SIDE CHAINS



ORDER NO.	mm	INNER LENGTH	PACKAGE
EIK10242040	4,0	31 mm	5 m
EIK10242050	5,0	34 mm	5 m
EIK10242060	6,0	38 mm	5 m
EIK10242070	7,0	42 mm	5 m
EIK10242080	8,0	50 mm	5 m
EIK10242090	9,0	57 mm	5 m

## THREADED CHAINS WITHOUT STUDS



ORDER NO.	mm	PACKAGE
EIK10254050	5,0	5 m
EIK10254060	6,0	5 m
EIK10254070	7,0	5 m
EIK10254080	8,0	5 m
EIK10254095	9,5	5 m

## SQUARE CHAIN



ORDER NO.	mm	PACKAGE
EIK10142051	5,0	5 m incl. wear piece
EIK10142050	5,0	5 m

## SNAP LOCKS



ORDER NO.	NO.	DESCRIPTION	pcs/pack
EIK10246005	0	terrain car	
EIK10246001	1	car	2 000
EIK10246002	2	for 6 mm side chain	1 500
EIK10246003	3	for 7-8 mm side chain	800

## THREADED CHAINS WITH STUDS



ORDER NO.	mm	PACKAGE
EIK10254250	5,0	5 m
EIK10254260	6,0	5 m
EIK10254270	7,0	5 m
EIK10254280	8,0	5 m
EIK10254295	9,5	5 m

## SIDE HOOKS



ORDER NO.	mm	pcs/pack
EIK10243045	4,5	2800
EIK10243055	5,5	2000
EIK10243060	6,0	1700
EIK10243070	7,0	1200
EIK10243080	8,0	900
EIK10243090	long 9,0	600
EIK10243100	10,0	450

## S-HOOK

- including middle rubber



ORDER NO.	mm	DESCRIPTION
EIK10253385	8,5	for 8-9 mm chain
EIK10253310	10	for 9,5-10 mm chain
EIK10253311	11	for 11 mm chain
EIK10253313	13	for 13 mm chain

## INNER LOCKS



ORDER NO.	NO.	DESCRIPTION	pcs/pack
EIK10246105	0	terrain car	
EIK10246101	1	car	4 800
EIK10246102	2	for 6-7 mm side chain	1 700
EIK10246103	3	for 8-10 mm side chain	1 000

## ICE BLOK CHAINS FOR CARS



The tire-chain is an emergency means.  
 Don't exceed the speed of 50 km/h.  
 Chains are manufactured from high resistance steel 3,5 mm case hardened and galvanized.  
 Chain pair is packed in very handy plastic box.  
 Can be fitted very easily in a minute.

### Fitting:



1. Lay the chain down on the ground and make sure that is not entangled and that the double hooks are facing the ground. Pass the red side of the cable behind the wheel.



2. Take the two ends of the cable and lift them to the top-right side of the wheel and hook them.



3. Hook the flat zinc plated hook to the link of the side chain. Push the cable to the inner side of the wheel and make sure that it doesn't lay on the tread.



4. Insert the end of the small tensioning chain in the hook. Pull the tensioning chain and hook it to the side chain.

08.06.2006

- chain diameter 3,5 mm
- metal core cable 3,5 mm
- maximum speed 50 km/h

ORDER NUMBER	TYRE SIZE							
	10"	12"	13"	14"	15"	16"	17"	18/19"
<b>JÄÄ015</b>	155/80-10	500-12	135/70-13					
	165/70-10	130/80-12	146/65-13					
		135/80-12	145/60-13					
		140/70-12						
		145/70-12						
<b>JÄÄ030</b>		155/80-12	145/80-13	135/80-14	135/70-15			
		165/70-12	155/70-13	175/50-14				
			165/65-13					
<b>JÄÄ040</b>			175/60-13					
			155/80-13	145/80-14				
			165/70-13	165/65-14				
			175/65-13					
<b>JÄÄ050</b>			185/60-13					
			195/55-13	155/80-14	155/70-15			
			165/80-13	165/70-14	175/55-15			
			185/65-13	175/65-14	195/45-15			
				185/60-14				
<b>JÄÄ060</b>			195/55-14					
			175/80-13	165/80-14	175/65-15	185/50-16		
			185/70-13	165/75-14	175/60-15	195/45-16		
			195/60-13	175/70-14	185/55-15			
			205/60-13	185/65-14	195/50-15			
<b>JÄÄ070</b>			195/60-14					
			205/55-14	175/80-14	175/70-15	195/50-16	205/40-17	
			195/70-13	175/75-14	185/65-15	205/45-16		
				185/70-14	195/60-15			
				195/65-14				
<b>JÄÄ075</b>			205/60-14					
					205/55-15	205/50-16		
<b>JÄÄ080</b>					215/50-15			
			205/70-13	185/80-14	185/70-15	195/55-16	215/40-17	
				195/70-14	195/65-15	195/60-16		
				205/65-14	205/60-15	225/45-16		
<b>JÄÄ090</b>				225/55-14				
				195/80-14	195/70-15	195/65-16	205/50-17	
				205/70-14	205/65-15	205/60-16	215/45-17	
					215/60-15	205/55-16	235/40-17	
					225/55-15	215/50-16		
<b>JÄÄ095</b>				235/60-14	195/75-15	205/65-16	225/45-17	
					205/70-15	215/55-16	245/40-17	
					215/65-15	225/50-16		
					225/60-15			
<b>JÄÄ100</b>					235/55-15			
				215/70-14	215/70-15	215/60-16	225/50-17	225/45-18
					225/65-15	225/55-16	235/45-17	225/40-18
					235/60-15	235/50-16		235/40-18
<b>JÄÄ102</b>					245/45-16			
					215/70-16	225/55-17	245/40-18	
					215/65-16	235/50-17		
					225/60-16	245/45-17		
<b>JÄÄ104</b>					255/40-17			
					235/60-16	225/60-17	245/45-18	
						255/45-17	255/40-18	
					245/50-17			

08.06.2006

- can be fitted easily
- maximum speed of vehicle 40 km/h
- material thickness of chain 4,5 mm
- metal core cable 6 mm



**RAPID MATIC V5**



RAPID MATIC V5

ORDER NUMBER	TYRE SIZE					
	14"	15"	16"	16,5"	17"	17,5/18/19"
<b>JÄÄ113</b>	700-14 185-14 185/75-14 195/70-14 195/75-14	640-15				
<b>JÄÄ114</b>	670-14 195-14	185-15 195/70-15 195/75-15 205/65-15	175-16 175/80-16 175/75-16 195/65-16			
<b>JÄÄ115</b>	205-14 205/75-14	195-15 205/75-15 205/70-15 215/65-15	185/75-16 205/65-16			
<b>JÄÄ116</b>	750-14 215-14 215/75-14	670-15 215/70-15 225/70-15	600-16 640-16 185-16 195-16 195/75-16 215/70-16 215/65-16	800-16,5		
<b>JÄÄ117</b>		700-15 215-15 215/80-15 215/75-15 225/75-15 255/60-15	650-16 205/80-16 205/75-16 225/65-16 235/60-16		235/55-17	7-17,5
<b>JÄÄ118</b>		235/75-15 235/70-15 28x9-15	215-16 215/85-16 215/75-16 225/75-16 225/70-16		6,50-17	
<b>JÄÄ119</b>		275/60-15 840-15 255/70-15 30x9,50-15	235/70-16		235/65-17	235/55-18
<b>JÄÄ120</b>		750-15 9-15 265/70-15	700-16 750-16 245/70-16 245/75-16 255/65-16		255/60-17	8-17,5 205/75-17,5 215/75-17,5 235/60-18
<b>JÄÄ121</b>		10x15 255/75-15 265/75-15 31x10,50-15	255/70-16 235/80-16		275/55-17	255/50-19 255/55-18 255/60-18
<b>JÄÄ122</b>		31x11,5-15	265/70-16		245/70-17 265/65-17	265/60-18 285/45-19 285/50-18

**T14.10**